

1.

z UTEK
 z
 z Logo 

2.

V1.0	2022-07-30			

3.


z USB RS-232

4.


1 USBV1.1 1.0 2.0 EIA RS-232
 2 USB VCC DATA- DATA+ GND FG
 3 RS-232 DCD RXD TXD DTR GND DSR RTS CTS RI
 4
 5
 6 300-460800bps,
 7
 8 RS-232 5 USB 5
 9 ± 15KV
 10 USB A ,DB9
 11
 12 1530mm× 34mm× 16mm
 13 -40 85 5% 95%
 14 Windows95/98/2000/2008/xp/Vista/win7/win10/win11 MAC Linux

5.


DB9 F(PIN)	
1	
2	SOUT (TXD)
3	SIN (RXD)
4	DSR
5	GND
6	DTR
7	CTS
8	RTS
9	RI

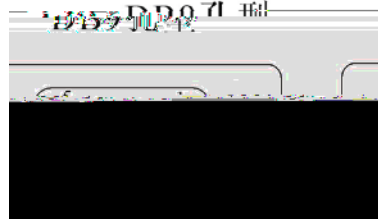

USB-A USB

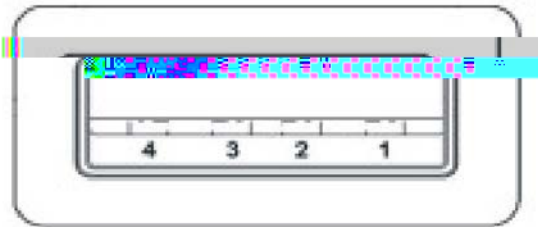


6.

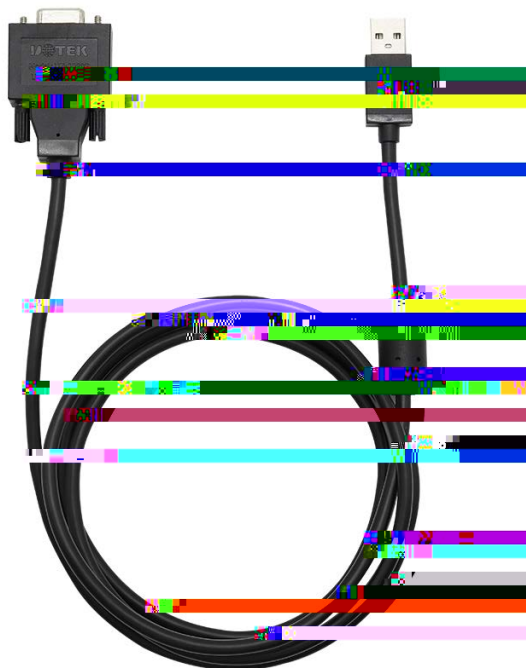

7. ()

8.

mm

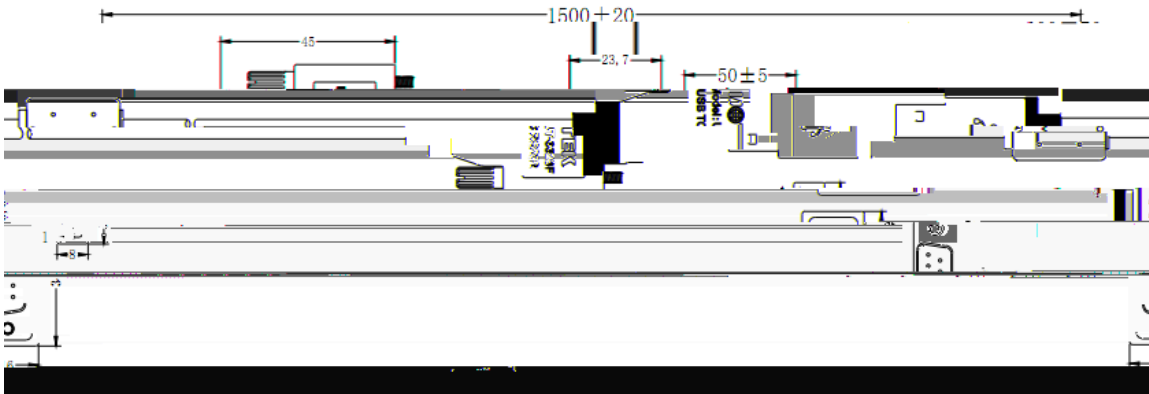

- 1 USB A
- 2
- 3 USB2.0
- 4 DB9

9.

10.

	1PC
	1PC
	1PC
	1PC
USB	1PC

11.



180*138*40mm± 1mm

:

12.

-40 +85 , 5% 95%

13. / /

14.

15.