



# UT-208

1.



2.

UT-208  
VER: 01

3.

RS-232/485/422

4.

1	EIA/TIA	RS-232C	RS-485/RS-422	
2	RS-232	DB9	RS-422/RS-485	DB9
3	RS-232	+/-15KV ESD	RS-422 RS-485	600W
4	2500Vrms	500DC	DC/DC	
5				
6		PWR	TXD	RXD
7				
8	115.2Kbps	300m		
	38.4Kbps	2.4Km		
	9600bps	5Km		
9	-40	85		
			5%	95%
11	0-5,000	115200bps-9600bps		



5.


RS-232C

DB9	(PIN)	
1		
2		SOUT (TXD)
3		SIN (RXD)
4		DTR
5		GND
6		DSR
7		RTS
8		CTS
9		RI

RS-485/RS-422

DB9	/ (PIN)		RS-422	RS-485
1		T/R+	(A+)	RS-485 (A+)
2		T/R-	(B-)	RS-485 (B-)
3		RXD+	(A+)	
4		RXD-	(B-)	
5		GND		
6		VCC	9-24VDC 9-24VDC (100mA)	9-24VDC 9-24VDC (100mA)
7		N/A		
8		N/A		
9		N/A		

6.

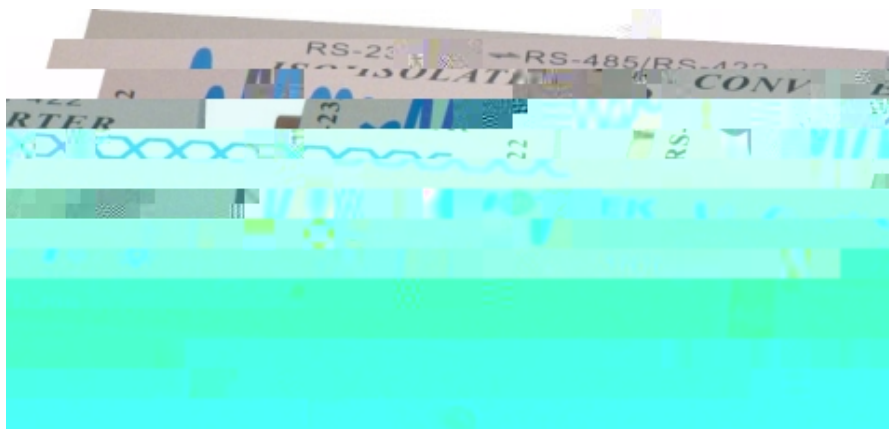





9.

10

11

2

/